


GETM3.5H



| | |
|------------------|----------|
| Max. axle load | 3500kg |
| Motor weight | 471kg |
| Working duty | S5-40%ED |
| Protection class | IP 40 |



Overall Dimensions

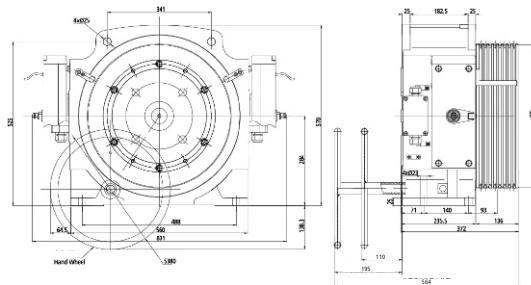

remarks:

- Both hand wind and hand wind-less types are available.
- The data in the bracket is for the size of hand wind-less type.
- Remote release device is available, the length of releasing wire ranges 4-10m.

| |
|-----|
| D |
| 450 |
| 490 |

Specification table

| Product type | Traction ratio | Load (kg) | Driver speed (rev/min) | Rated speed (rev/min) | Rated input (kVA) | Motor | | | | Brake | | | | Sheave | | | | |
|-------------------|----------------|-----------|------------------------|-----------------------|-------------------|------------|-------------|-------------|-----------|----------------|-------------|-------------|--------------|---------------|-----------|-------|---------|----------------|
| | | | | | | Power (kW) | Voltage (V) | Current (A) | Poles (p) | Frequency (Hz) | Current (A) | Voltage (V) | Release (kV) | Diameter (mm) | Rope (mm) | Angle | Y angle | Clearance (mm) |
| GETM3.5H-100/1150 | 2:1 | 1200 | 1.0 | 85 | 793 | 7.0 | 17.3 | 340 | 16 | 22.7 | 2x1.1 | Dc110 | 2x1000 | 450 | 8xø10 | 90° | 25° | 15 |
| GETM3.5H-160/1150 | | | 1.6 | 149 | | 12.3 | 28 | | | 39.6 | | | | | | | | |
| GETM3.5H-200/1150 | | | 2.0 | 170 | | 14.1 | 30.1 | | | 45.3 | | | | | | | | |
| GETM3.5H-250/1150 | | | 2.5 | 212 | | 17.6 | 40 | | | 56.5 | | | | | | | | |
| GETM3.5H-200/0800 | 2:1 | 800 | 2.0 | 156 | 604 | 9.8 | 23.6 | 340 | 16 | 41.6 | 2x1 | Dc110 | 2x940 | 490 | 5xø10 | 90° | 25° | 16 |
| GETM3.5H-250/0800 | | | 2.5 | 195 | | 12.3 | 29.1 | | | 52.0 | | | | | | | | |
| GETM3.5H-200/1000 | 2:1 | 1000 | 2.0 | 156 | 750 | 12.3 | 29.5 | 340 | 16 | 41.6 | 2x1 | Dc110 | 2x940 | 490 | 5xø10 | 90° | 25° | 16 |
| GETM3.5H-200/1000 | | | 2.0 | 156 | | 12.3 | 29.5 | | | 41.6 | | | | | 6xø10 | | | |
| GETM3.5H-250/1000 | | | 2.5 | 195 | | 15.3 | 35.1 | | | 52.0 | | | | | 5xø10 | | | |
| GETM3.5H-250/1000 | | | 2.5 | 195 | | 15.3 | 35.1 | | | 52.0 | | | | | 6xø10 | | | |

